

HD 8 VV

Tandem roller with two vibrating roller drums

Tandem rollers Series HD CompactLine / Series H263




HIGHLIGHTS HD CompactLine







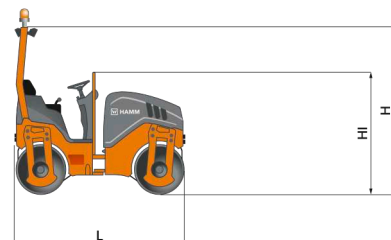


- > Simple, intuitive and language-neutral control
- > Simple transport, simple loading
- > Excellent view of drum edge, machine and construction site environment
- > Compact dimensions
- > Clear Side — one-sided drum mounting

Machine dimensions

Total length (L)	mm • in	2295 • 90.4
Width (B)	mm • in	880 • 34.6
Total height (H)	mm • in	2210 • 87.0
Drum width (X)	mm • in	800/800 • 31.5/31.5
Height, loading, min. (HI)	mm • in	1580 • 62.2



EU Stage V /
EPA Tier 4

TECHNICAL DATA		Unit	HD 8 VV
	Weights		
Operating weight with ROPS	kg • lbs		1590 • 3,506
Operating weight, max.	kg • lbs		1690 • 3,726
Static linear load, front/rear	kg/cm • lbs/in		9,6/10,3 • 53.8/57.7
French classific., data/class			10,3/PV3
	Machine dimensions		
Total length	mm • in		2295 • 90.4
Total height with ROPS	mm • in		2210 • 87.0
Height, loading, min.	mm • in		1580 • 62.2
Wheelbase	mm • in		1560 • 61.4
Total width	mm • in		938 • 36.9
Max. working width	mm • in		872 • 34.3
Turning radius, inside	mm • in		2230 • 87.8
	Drum dimensions		
Drum width, front/rear	mm • in		800/800 • 31.5/31.5
Drum diameter, front/rear	mm • in		620/620 • 24.4/24.4
Drum thickness, front/rear	mm • in		12/12 • 0.5/0.5
Drum type, front			Smooth/non-split
Drum type, rear			Smooth/non-split
	Diesel engine		
Manufacturer			KUBOTA
Type			D1105
Number of cylinders			3
Power rat. ISO 14396, kW/PS/rpm			16,1/21,9/2600
Power rating SAE J1349, kW/HP/rpm			16,1/21,6/2600
Emission standard			EU Stage V / EPA Tier 4
Exhaust gas after-treatment			-
	Drive		
Speed, infinitely variable	km/h • mph		0 - 11,0 • 0.0 - 6.8
Climbing ability, vibration on/off	%		30/40
	Vibration		
Vibration frequency, front, I/II	Hz • vpm		61/48 • 3,660/2,880
Vibration frequency, rear, I/II	Hz • vpm		61/48 • 3,660/2,880
Amplitude, front, I/II	mm • in		0,43/0,43 • .017/.017
Amplitude, rear, I/II	mm • in		0,43/0,43 • .017/.017
Centrifugal force, front, I/II	kN • lbs		17/11 • 3,825/2,475
Centrifugal force, rear, I/II	kN • lbs		17/11 • 3,825/2,475
	Steering		
Oscillation angle +/-	°		8
Steering, type			Articulated steering
	Sprinkler system		
Water sprinkler, type			Pressure
	Tank capacity/Fill capacity		
Fuel tank, capacity	L • Gal		33 • 8.7
Water tank, capacity	L • Gal		70 • 18.5
	Sound level		
Acoustic power LW(A), sticker	db(A)		105
Acoustic power LW(A), measured	db(A)		101

EQUIPMENT
 12 V outlet, 3-point articulation, Dashboard with displays, indicator lights and switches, Dashboard cover, lockable and weather-resistant, Clear Side, Pressure water sprinkling with interval switch, Operator's platform with entry from both sides, V-belt protection, Automatic vibration system, Water filtering (triple), Central lifting bracket

OPTIONAL EQUIPMENT
 Plastic scraper, foldable, Additional drive lever, left, Protective roof, Automatic engine-off function, Back-up alarm, Working light, Rotating beacon, Battery isolating switch, Bonnet with sound insulation, Water drain valve, Additional mirror, Tool kit

WIRTGEN AMERICA

6030 Dana Way
 Antioch, TN 37013
 Phone +1 615-501-0600
 Fax +1 615-501-0691
 info.america@wirtgen-group.com
 www.wirtgen-group.com/america

HAMM AG

Hammstraße 1
 D-95643 Tirschenreuth
 Tel +49 9631 80-0
 Fax +49 9631 80-111
 www.hamm.eu

